
HS76-17 - Leg Kit

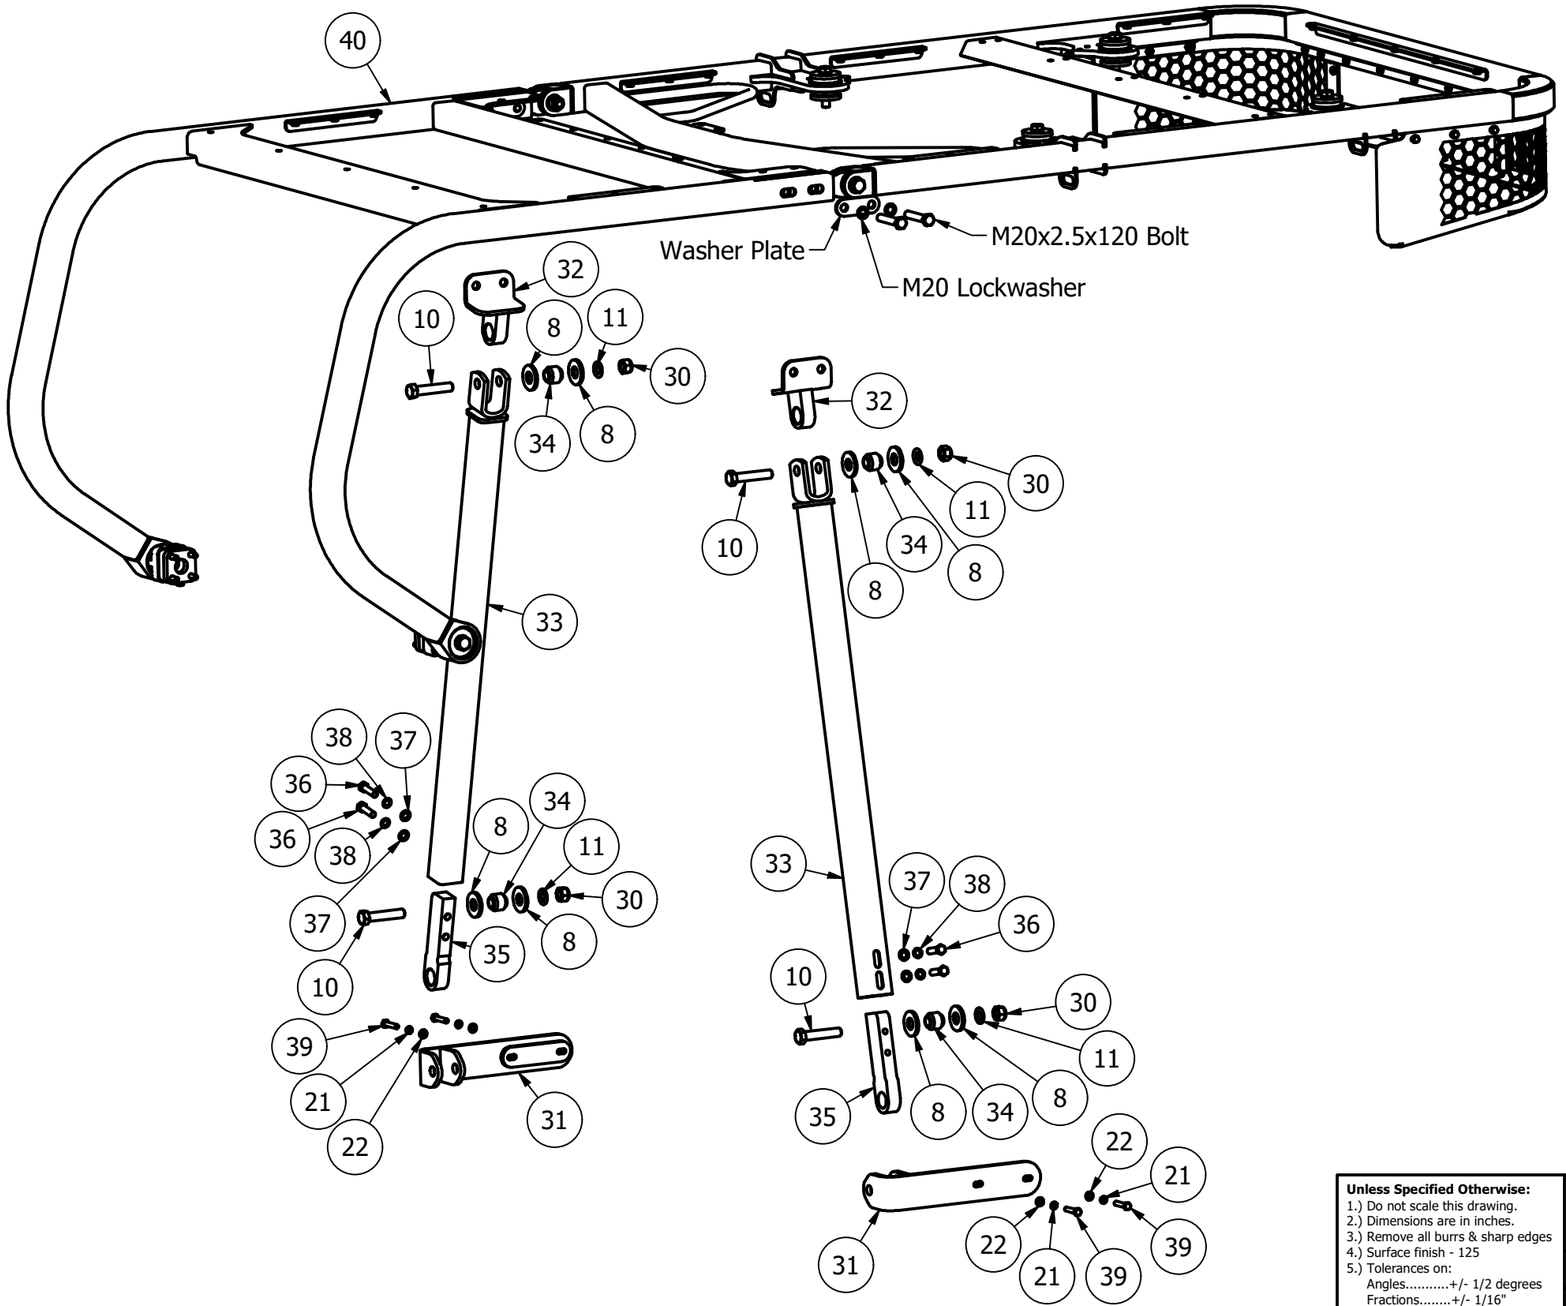

Note:
When adding the leg kit to the sweeps, the four (4) M20x2.5x120 bolts should be removed to allow the washer plate to be taken off and replaced with the bracket (item 32). The bracket serves as a new washer plate and leg bracket. Use the four bolts and lockwashers from the sweeps to secure the bracket.

PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
8	8	8P-5244D	Rubber Washer
10	4	M24 X 3.0 X 120 MM	Bolt
11	4	M24	Flatwasher
21	4	M12 (40385)	Lock Washer
22	4	M12 (40359)	Flat Washer
30	4	M24LN	Gr. 8 Locknut
31	2	HS76-17-01	Fender Bracket
32	2	HS91-03-01	Bracket As.
33	2	HS91-03-03	Leg As.
34	4	9S-5187D	Rubber Isolator
35	2	441-5935D	Leg Stob
36	4	M16 X 2.0 X 60 MM	Bolt
37	4	M16 (40361)	Flat Washer
38	4	M16 (40387)	Lock Washer
39	4	M12 X 1.75 X 60 MM	Bolt
40	1	HS76	Sweep As.

Unless Specified Otherwise:
1.) Do not scale this drawing.
2.) Dimensions are in inches.
3.) Remove all burrs & sharp edges
4.) Surface finish - 125
5.) Tolerances on:
Angles.....+/- 1/2 degrees
Fractions.....+/- 1/16"
Decimals .xx...+/- .010
.xxx..+/- .005

This drawing is the property of Diamond Attachments, LLC & cannot be reproduced or used without the written consent of Diamond Attachments,LLC.

Diamond Attachments, LLC
4381 S. Mississippi, Ste. A, Atoka, Oklahoma 74525

Part # HS76-17
Drawn by: R.K.C.
Rev. NA
Date: 7/22/2026
Finish: NA
Mat.: NA
Drawing File: HS76-17 (LEG KIT)
Sheet: 1 of 1
Tumble: NA
Pre Heat Treat: NA
Heat Treat Spec.: NA
Title: HS76 LEG KIT